

Single Phase Hybrid Storage Inverter

1-3.6 kW




The Afore AF low voltage series storage Inverters are designed to increase energy independence for homeowners. The power range is from 1kW to 3.6kW, compatible with low voltage (40-60V) batteries.

Energy management is based on time-of-use and demand charge rate structures, which significantly reduce the amount of energy purchased from the public grid.



Thanks for the UPS function (switch time < 10ms), that enables the crucial loads power on during outages. Additionally, under the backup operation mode, the inverter provides you up to 150% peak output overloading.

The AF low voltage series storage inverters are integrated with Arc Fault Circuit Interrupter (AFCI) and rapid shutdown.

For New Storage System:

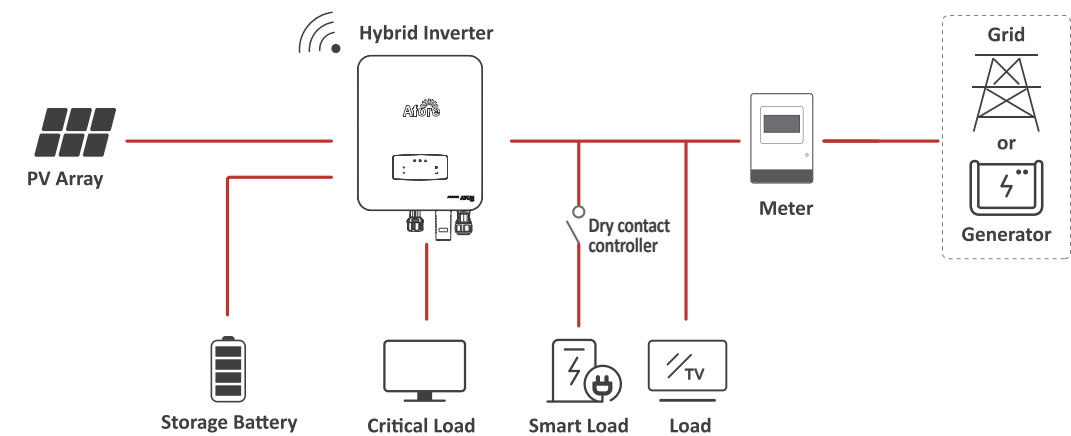


Optimizing Self-Consumption (on-grid) + Emergency Power Supply (off-grid)

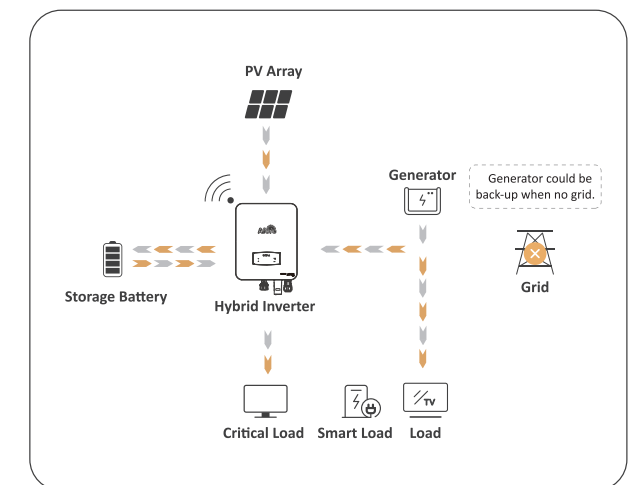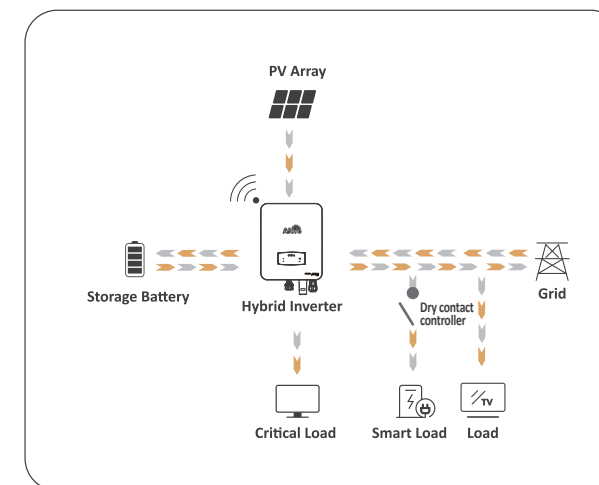

Optimizing Self-Consumption Mode

With home energy storage installed, home owners may also be able to change from a flat rate electricity tariff to a time-of-use tariff. For the areas and regions, where peak shaving can be applied.

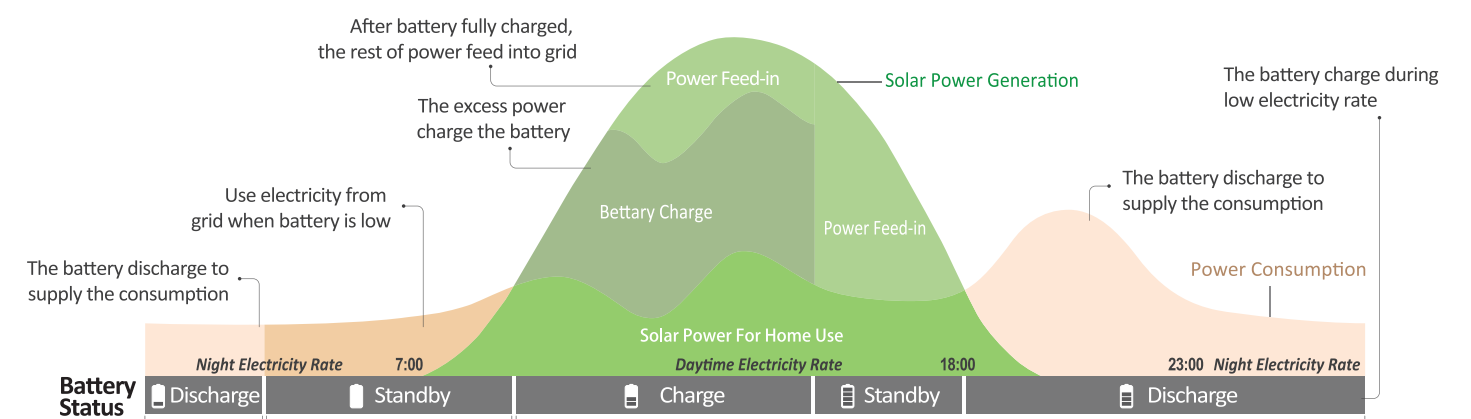

Max. 1.5	2 MPPT	<10 ms	PARALLEL	INPUT
PV OVERSIZE	MPPT CHANNELS	UPS FUNCTION	PARALLEL	INPUT
1.5 Times PV Oversize	Up to 2 MPPT Channels	Switch Time < 10ms	Max.6 Parallel Stacking	Support Generator

Support for Time-of-use Optimization	Build in Anti-feed-in Function
Configurable Operation Modes	Compact Size and Easy Installation
Arc Fault Circuit Interrupter (AFCI) (Optional)	Smart Monitoring & Remote Firmware Upgrade

■ Technical Data	AF1K-SL-1	AF1.5K-SL-1	AF2K-SL-1	AF2.5K-SL-1
PV Input				
Max. Input Power (kW)	1.5	2.3	3.0	3.8
Max. PV Voltage (V)	550			
MPPT Range (V)	80 - 500			
Full MPPT Range (V)	80 - 500	90 - 500	120 - 500	150 - 500
Normal Voltage (V)	360			
Startup Voltage (V)	100			
Max. Input Current (A)	18.5 x 1			
Max. Short Current (A)	26 x 1			
No. of MPP Tracker / No. of PV String	1 / 1			
Battery Port				
Max. Charge/Discharge Power (kW)	1.0	1.5	2.0	2.5
Max. Charge/Discharge Current (A)	25	40	50	63
Battery Normal Voltage (V)	51.2			
Battery Voltage Range (V)	40 - 60			
Battery Type	Li-ion / Lead-acid etc.			
AC Grid				
Max Continuous Current (A)	5.0	7.0	10.0	12.0
Max Continuous Power (kVA)	1.0	1.5	2.0	2.5
Nominal Grid Current (A)	4.6 / 4.4	6.9 / 6.6	9.1 / 8.7	11.4 / 10.9
Nominal Grid Voltage (V)	198 to 242 @ 220 / 207 to 253 @ 230			
Nominal Grid Frequency (Hz)	50 / 60			
Power Factor	0.999 (Adjustable from 0.8 overexcited to 0.8 underexcited)			
Current THD (%)	< 3			
AC Load Output				
Max Continuous Current (A)	5.0	7.0	10.0	12.0
Max Continuous Power (kVA)	1.0	1.5	2.0	2.5
Max Peak Current (A) (10min)	6.9 / 6.6	10.5 / 10.0	13.7 / 13.1	17.3 / 16.6
Max Peak Power (kVA) (10min)	1.5	2.3	3.0	3.8
Nominal AC Voltage L-N (V)	220 / 230			
Nominal AC Frequency (Hz)	50 / 60			
Switching Time (ms)	Seamless			
Voltage THD (%)	< 3			
Efficiency				
CEC Efficiency (%)	97.0			
Max. Efficiency (%)	97.6			
PV to Bat. Efficiency (%)	98.1			
Bat. between AC Efficiency (%)	96.8			
Protection				
PV Reverse Polarity Protection	Yes			
Over Current/Voltage Protection	Yes			
Anti-Islanding Protection	Yes			
AC Short Circuit Protection	Yes			
Residual Current Detection	Yes			
Ground Fault Monitoring	Yes			
Insulation Resister Detection	Yes			
PV Arc Detection	Yes			
Enclosure Protect Level	IP65 / NEMA4X			
AC/DC surge protection	Type II			
General Data				
Dimensions (W x H x D, mm)	370 x 535 x 192			
Weight (kg)	18.5			
Topology	Transformerless			
Cooling	Intelligent Fan			
Relative Humidity	0 - 100 %			
Operating Temperature Range (°C)	- 25 to 60			
Operating Altitude (m)	< 4000			
Noise Emission (dB)	< 25			
Standby Consumption (W)	< 10			
Mounting	Wall Bracket			
Communication with RSD	SUNSPEC			
Display & Communication Interfaces	LCD, LED, RS485, CAN, Wi-Fi, GPRS, 4G			
Certification & Approvals	NRS097, G98, EN50549-1, C10/C11, AS4777.2, VDE-AR-N4105, VDE0126, IEC62109-1, IEC62109-2			
EMC	EN61000-6-2, EN61000-6-3			

■ Technical Data	AF3K-SL-1	AF3.6K-SL-1	AF3K-SL	AF3.6K-SL
PV Input				
Max. Input Power (kW)	4.5	5.4	4.5	5.4
Max. PV Voltage (V)	550			
MPPT Range (V)	80 - 500			
Full MPPT Range (V)	170 - 500	210 - 500	90 - 500	110 - 500
Normal Voltage (V)	360			
Startup Voltage (V)	100			
Max. Input Current (A)	18.5 x 1		18.5 x 2	
Max. Short Current (A)	26 x 1		26 x 2	
No. of MPP Tracker / No. of PV String	1 / 1		2 / 2	
Battery Port				
Max. Charge/Discharge Power (kW)	3.0	3.6	3.0	3.6
Max. Charge/Discharge Current (A)	80			
Battery Normal Voltage (V)	51.2			
Battery Voltage Range (V)	40 - 60			
Battery Type	Li-ion / Lead-acid etc.			
AC Grid				
Max Continuous Current (A)	14.0	17.0	14.0	17.0
Max Continuous Power (kVA)	3.0	3.6	3.0	3.6
Nominal Grid Current (A)	13.7 / 13.1	16.4 / 15.7	13.7 / 13.1	16.4 / 15.7
Nominal Grid Voltage (V)	198 to 242 @ 220 / 207 to 253 @ 230			
Nominal Grid Frequency (Hz)	50 / 60			
Power Factor	0.999 (Adjustable from 0.8 overexcited to 0.8 underexcited)			
Current THD (%)	< 3			
AC Load Output				
Max Continuous Current (A)	14.0	17.0	14.0	17.0
Max Continuous Power (kVA)	3.0	3.6	3.0	3.6
Max Peak Current (A) (10min)	20.5 / 19.6	24.6 / 23.5	20.5 / 19.6	24.6 / 23.5
Max Peak Power (kVA) (10min)	4.5	5.4	4.5	5.4
Nominal AC Voltage L-N (V)	220 / 230			
Nominal AC Frequency (Hz)	50 / 60			
Switching Time (ms)	Seamless			
Voltage THD (%)	< 3			
Efficiency				
CEC Efficiency (%)	97.0			
Max. Efficiency (%)	97.6			
PV to Bat. Efficiency (%)	98.1			
Bat. between AC Efficiency (%)	96.8			
Protection				
PV Reverse Polarity Protection	Yes			
Over Current/Voltage Protection	Yes			
Anti-Islanding Protection	Yes			
AC Short Circuit Protection	Yes			
Residual Current Detection	Yes			
Ground Fault Monitoring	Yes			
Insulation Resister Detection	Yes			
PV Arc Detection	Yes			
Enclosure Protect Level	IP65 / NEMA4X			
AC/DC surge protection	Type II			
General Data				
Dimensions (W x H x D, mm)	370 x 535 x 192			
Weight (kg)	18.5			
Topology	Transformerless			
Cooling	Intelligent Fan			
Relative Humidity	0 - 100 %			
Operating Temperature Range (°C)	- 25 to 60			
Operating Altitude (m)	< 4000			
Noise Emission (dB)	< 25			
Standby Consumption (W)	< 10			
Mounting	Wall Bracket			
Communication with RSD	SUNSPEC			
Display & Communication Interfaces	LCD, LED, RS485, CAN, Wi-Fi, GPRS, 4G			
Certification & Approvals	NRS097, G98/G99, EN50549-1, C10/C11, AS4777.2, VDE-AR-N4105, VDE0126, IEC62109-1, IEC62109-2			
EMC	EN61000-6-2, EN61000-6-3			