

Three Phase Hybrid Storage Inverter

3-30 kW



The Afore AF series three phase storage inverters are designed to increase energy independence for homeowners and commercial users. The power range is from 3.0kW to 30kW, compatible with high voltage (150-800V) batteries.

Energy management is based on time-of-use and demand charge rate structures, significantly reduce the amount of energy purchased from public grid.

Thanks for the UPS function (switch time < 10ms), that enables the crucial loads power on during outages. Additionally, under the backup operation mode, the inverter provides you up to 150% peak output overloading.

SODIUM METAL CHLORIDE BATTERY
Support Sodium metal chloride battery

WIDE RANGE
Voltage Range (150-800V)

100% UNBALANCE
Support Unbalance Load

Max. 1.5
PV OVERSIZE
1.5 Times PV Oversize

Max. 40A
MAX. 40A_{dc}
String Current Up To 40A

<10 ms
UPS FUNCTION
Switch Time < 10ms

INPUT
Support Generator

Support for Time-of-use Optimization

Configurable Operation Modes


AFCI (Optional) & Rapid Shutdown Ready

Build in Anti-feed-in Function


100% unbalanced output, each phase;
200% unbalanced output, each phase (≤ 10kW)

Smart Monitoring & Remote Firmware Upgrade

For New Storage System:

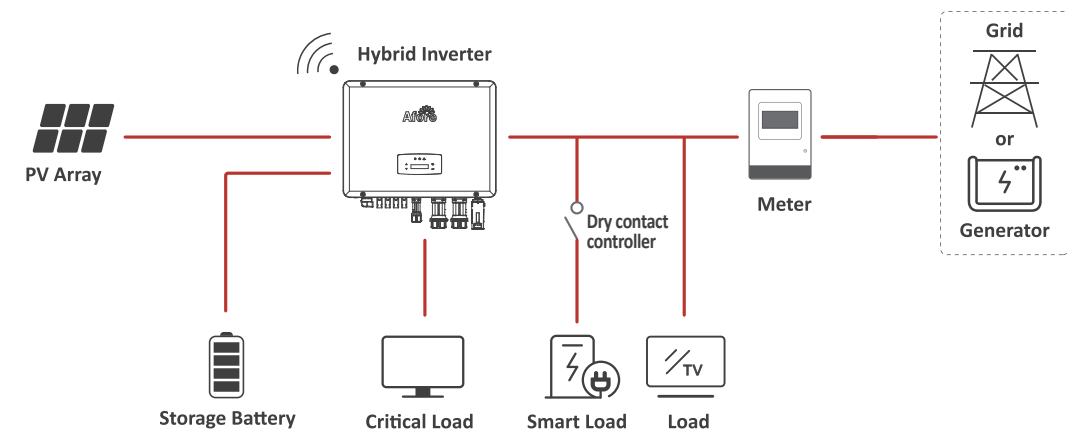


Optimizing Self-Consumption (on-grid) + Emergency Power Supply (off-grid)

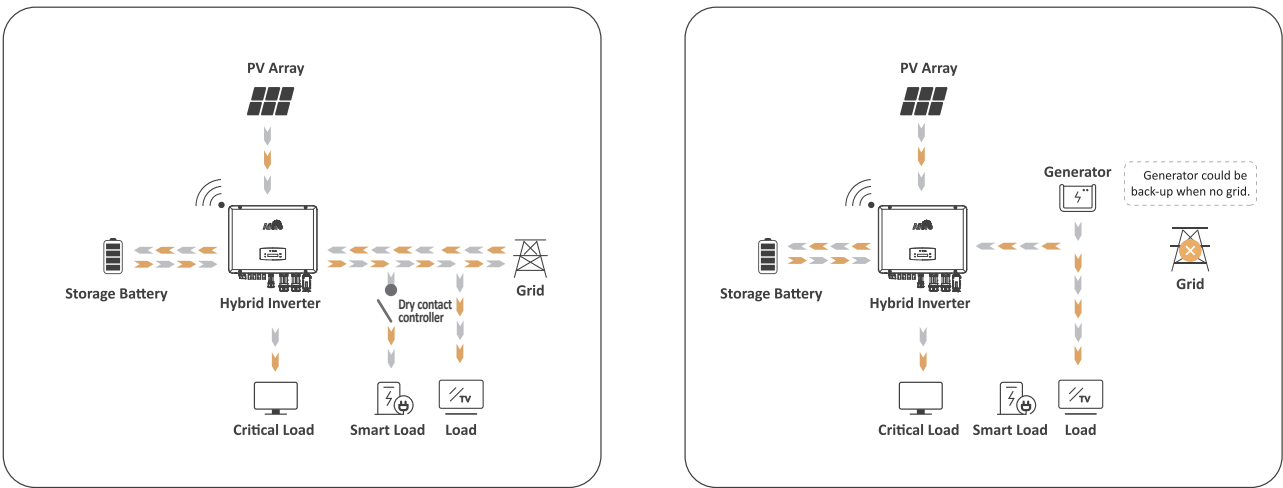

Optimizing Self-Consumption Mode

With energy storage system installed, users may also be able to change from a flat rate electricity tariff to a time-of-use tariff. For the areas and regions, where peak shaving can be applied.

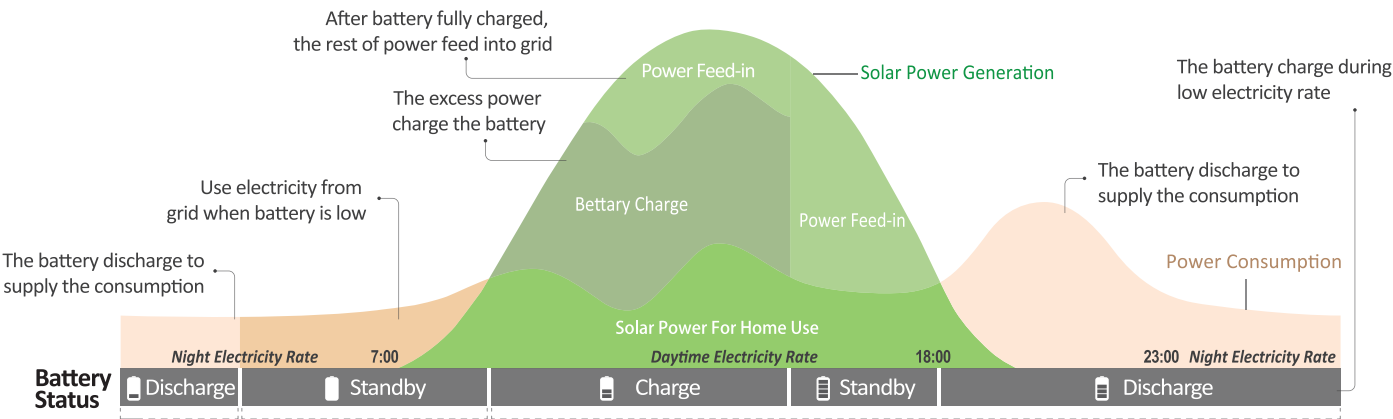

Technical Data	AF3K-TH	AF4K-TH	AF5K-TH	AF6K-TH	AF8K-TH	AF10K-TH
PV Input						
Max. DC Input Power (kW)	5	6	7.5	9	12	15
Max. PV Voltage (V)	1000					
Rated DC Input Voltage (V)	620					
DC Input Voltage Range (V)	150-1000					
MPPT Voltage Range (V)	150-850					
Full MPPT Range(V)	200-850			250-850	300-850	500-850
Start-up Voltage (V)	160					
Max. DC Input Current (A)	20x2					
Max. Short Current(A)	30x2					
No. of MPPT Tracker / Strings	2/2					
Battery Port						
Battery Nominal Voltage (V)	200	200	200	250	300	400
Battery Voltage Range (V)	150-800					
Max. Charge/Discharge Current (A)	30					
Max. Charge/Discharge Power (kW)	3	4	5	6	8	10
Charging Curve	3 Stages					
Compatible Battery Type	Li-ion / Lead-acid / Sodium metal chloride battery					
AC Grid						
Nominal AC Output Power (kW)	3	4	5	6	8	10
Max. AC Input/Output Power (kVA)	4.5 / 3.3	6 / 4.4	7.5 / 5.5	9 / 6.6	12 / 8.8	15 / 11
Max. AC Output Current (A)	5.3	7	8.5	10.5	13.5	17
Nominal AC Voltage (V)	230/400					
Nominal AC Frenquency (Hz)	50/60					
Power Factor	1 (-0.8-0.8) adjustable					
Current THD (%)	<3%					
AC Load Output (Back-up)						
Nominal Output Power (VA)	3000	4000	5000	6000	8000	10000
Nominal Output Voltage (V)	230/400					
Nominal Output Frequency (Hz)	50/60					
Nominal Output Current (A)	4.4	5.8	7.3	8.7	11.6	14.5
Peak Output Power	3300VA, 60s	4400VA, 60s	5500VA, 60s	6600VA, 60s	8800VA, 60s	11000VA, 60s
THDV (with linear load)	<3%					
Switching Time (ms)	<10					
Efficiency						
Europe Efficiency			97.50%			
Max. Efficiency	98.00%				98.20%	
Battery Charge/Discharge Efficiency	98.00%					
Protection						
Reverse Polarity Protection	Yes					
Over Current / Voltage Protection	Yes					
Anti-islanding Protection	Yes					
AC Short-circuit Protection	Yes					
Leakage Current Detection	Yes					
Ground Fault Monitoring	Yes					
Grid Monitoring	Yes					
Enclosure Protect Level	IP65					
AC/DC surge protection	Type II					
General Data						
Dimensions (W x H x D, mm)	558 x 535 x 260 mm					
Weight (kg)	29kg					
Topology	Transformerless					
Cooling Concept	Natural Convection				Intelligent Fan	
Relatively Humidity	0-100%					
Operating Temperature Range (°C)	-25 to 60 °C					
Operating Altitude (m)	<4000					
Noise Emission (dB)	<30					
Standby Consumption (W)	<5					
Display & Communication Interfaces	LCD, LED, RS485, CAN, Wi-Fi, GPRS, 4G					
Certification & Approvals	NRS097, G98/G99, EN50549-1, C10/C11, AS4777.2, VDE-AR-N4105, VDE0126, IEC62109-1, IEC62109-2					
EMC	EN61000-6-2, EN61000-6-3					

Technical Data	AF12K-TH		AF15K-TH		AF17K-TH		AF20K-TH		AF25K-TH		AF30K-TH	
PV Input												
Max. DC Input Power (kW)	18		22.5		25.5		30		37.5		45	
Max. PV Voltage (V)	1000											
Rated DC Input Voltage (V)	620											
DC Input Voltage Range (V)	150-1000											
MPPT Voltage Range (V)	150-850											
Full MPPT Range(V)	500-850											
Start-up Voltage (V)	160											
Max. DC Input Current (A)	20x2		20+32		32x2				40x2			
Max. Short Current(A)	30x2		30+48		48x2				60x2			
No. of MPPT Tracker / Strings	2/2		2/3		2/4				2/4			
Battery Port												
Battery Nominal Voltage (V)	450		500		400		500		500		550	
Battery Voltage Range (V)	150-800											
Max. Charge/Discharge Current (A)	30		50		50		50		60		60	
Max. Charge/Discharge Power (kW)	12		15		17		20		25		30	
Charging Curve	3 Stages											
Compatible Battery Type	Li-ion / Lead-acid / Sodium metal chloride battery											
AC Grid												
Nominal AC Output Power (kW)	12		15		17		20		25		30	
Max. AC Input/Output Power (kVA)	18 / 13.2		22.5 / 16.5		25.5 / 18.7		30 / 22		37.5 / 27.5		45 / 33	
Max. AC Output Current (A)	21.5		27		30		32		40		48	
Nominal AC Voltage (V)	230/400											
Nominal AC Frenquency (Hz)	50/60											
Power Factor	1 (-0.8-0.8) adjustable											
Current THD (%)	<3%											
AC Load Output (Back-up)												
Nominal Output Power (VA)	12000		15000		17000		20000		25000		30000	
Nominal Output Voltage (V)	230/400											
Nominal Output Frequency (Hz)	50/60											
Nominal Output Current (A)	17.4		21.8		24.7		29		36.3		43.5	
Peak Output Power	13200VA, 60s		16500VA, 60s		18700VA, 60s		22000VA, 60s		27500VA, 60s		33000VA, 60s	
THDV (with linear load)	<3%											
Switching Time (ms)	<10											
Efficiency												
Europe Efficiency	97.50%				97.80%				98.00%		98.10%	
Max. Efficiency			98.30%						98.50%			
Battery Charge/Discharge Efficiency	98.00%											
Protection												
Reverse Polarity Protection	Yes											
Over Current / Voltage Protection	Yes											
Anti-islanding Protection	Yes											
AC Short-ciruit Protection	Yes											
Leakage Current Detection	Yes											
Ground Fault Monitoring	Yes											
Grid Monitoring	Yes											
Enclosure Protect Level	IP65											
AC/DC surge protection	Type II											
General Data												
Dimensions (W x H x D, mm)	558 x 535 x 260 mm											
Weight (kg)	29kg						36kg					
Topology	Transformerless											
Cooling Concept	Intelligent Fan											
Relatively Humidity	0-100%											
Operating Temperature Range (°C)	-25 to 60 °C											
Operating Altitude (m)	<4000											
Noise Emission (dB)	<40											
Standby Consumption (W)	<5											
Display & Communication Interfaces	LCD, LED, RS485, CAN, Wi-Fi, GPRS, 4G											
Certification & Approvals	NRS097, G98/G99, EN50549-1, C10/C11, AS4777.2, VDE-AR-N4105, VDE0126, IEC62109-1, IEC62109-2											
EMC	EN61000-6-2, EN61000-6-3											